

STRUCTURAL NOTES

FOUNDATION NOTES

CODES AND SPECIFICATIONS

- 2021 EDITION OF THE INTERNATIONAL RESIDENTIAL CODE.
- ASCE 7-16, MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES.
- BUILDING RESEARCH ADVISORY BOARD (BRAB) REPORT #33: CRITERIA FOR SELECTION AND DESIGN OF RESIDENTIAL SLAB ON GROUND.
- ACI 301-05 SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS AND ACI-318-08 BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE.

MATERIALS

CONCRETE

- ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS OF 3000 PSI (FOUNDATION) / 4000 PSI (POOL)
 - MINIMUM CEMENT CONTENT: 4.5 SACKS/C.Y.
 - MAXIMUM WATER/CEMENT RATIO: 0.48
 - SLUMP RANGE: 5" MIN - 8" MAX.
 - MAX. COARSE AGGREGATE SIZE: $\frac{3}{4}$ "
- ALL REINFORCING SHALL BE ASTM A-615, GRADE 60
- STANDARD PROTECTIVE COVER OF REINFORCING BARS UNLESS OTHERWISE NOTED SHALL BE:
 - WHERE CAST AGAINST DIRT OR FILL 3"
 - EXPOSED TO EARTH OR WATER 2"
 - SLABS AND WALLS (EXTERIOR) 2"

FOUNDATION CONSTRUCTION


- REMOVE ALL VEGETATION AND TOP 6 INCHES OF TOP SOIL PRIOR TO CONSTRUCTING FOUNDATION (EXCEPT IN THE 1/2 CRZ OF PROTECTED TREES).
- DRAINAGE AROUND THE PERIMETER OF THE FOUNDATION SHALL BE DONE PER IRC SUCH THAT NO WATER SHALL COLLECT UNDER OR ADJACENT TO THE SLAB.
- HEAVY VEGETATION SUCH AS TREES WITHIN 20 FT. OF FOUNDATION MAY CAUSE EXCESSIVE WATER REMOVAL AND DAMAGE FOUNDATIONS. NO TREES SHOULD BE PLANTED WITHIN 20 FT OR THE MATURE HEIGHT OF THE TREE PLANTED.
- CONCRETE FOOTINGS TO BE A MINIMUM OF INCHES INTO UNDISTURBED SOIL OR BEARING DIRECTLY ON INTACT LIMESTONE BEDROCK. WHEN CONDITIONS PROHIBIT THIS DEPTH, CONTACT THE ENGINEER OF RECORD.
- FOR FIELD CONDITIONS NOT EXPLICITLY COVERED BY PLANS AND DETAILS, CONTACT ENGINEER OF RECORD.
- DO NOT SET FORMS BY THE FOUNDATION PLANS, USE ARCHITECTURAL PLANS.
- CONTRACTOR TO VERIFY ALL DROPS AND DIMENSIONS.
- REPORT ALL CONFLICTS TO THE ENGINEER OF RECORD.
- PRE-POUR INSPECTIONS BY ENGINEER OF RECORD IS REQUIRED.

407 Forrest St
Liberty Hill, TX 78642
(512) 215-4364
F-15009



MONK'S MOUNTAIN DR.
RESIDENCE
AUSTIN, TX 78734

COORDINATION DRAWINGS.
NOT FOR CONSTRUCTION.

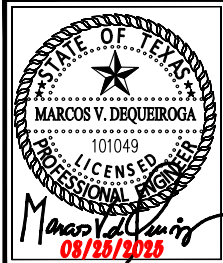


NO.	REVISION		DATE	
	REVIEW SET			
1.			08-25-25	

PROJECT: 25251
DATE: 08-25-25
DRAWN BY: DL

SCALE: AS NOTED

S0.0

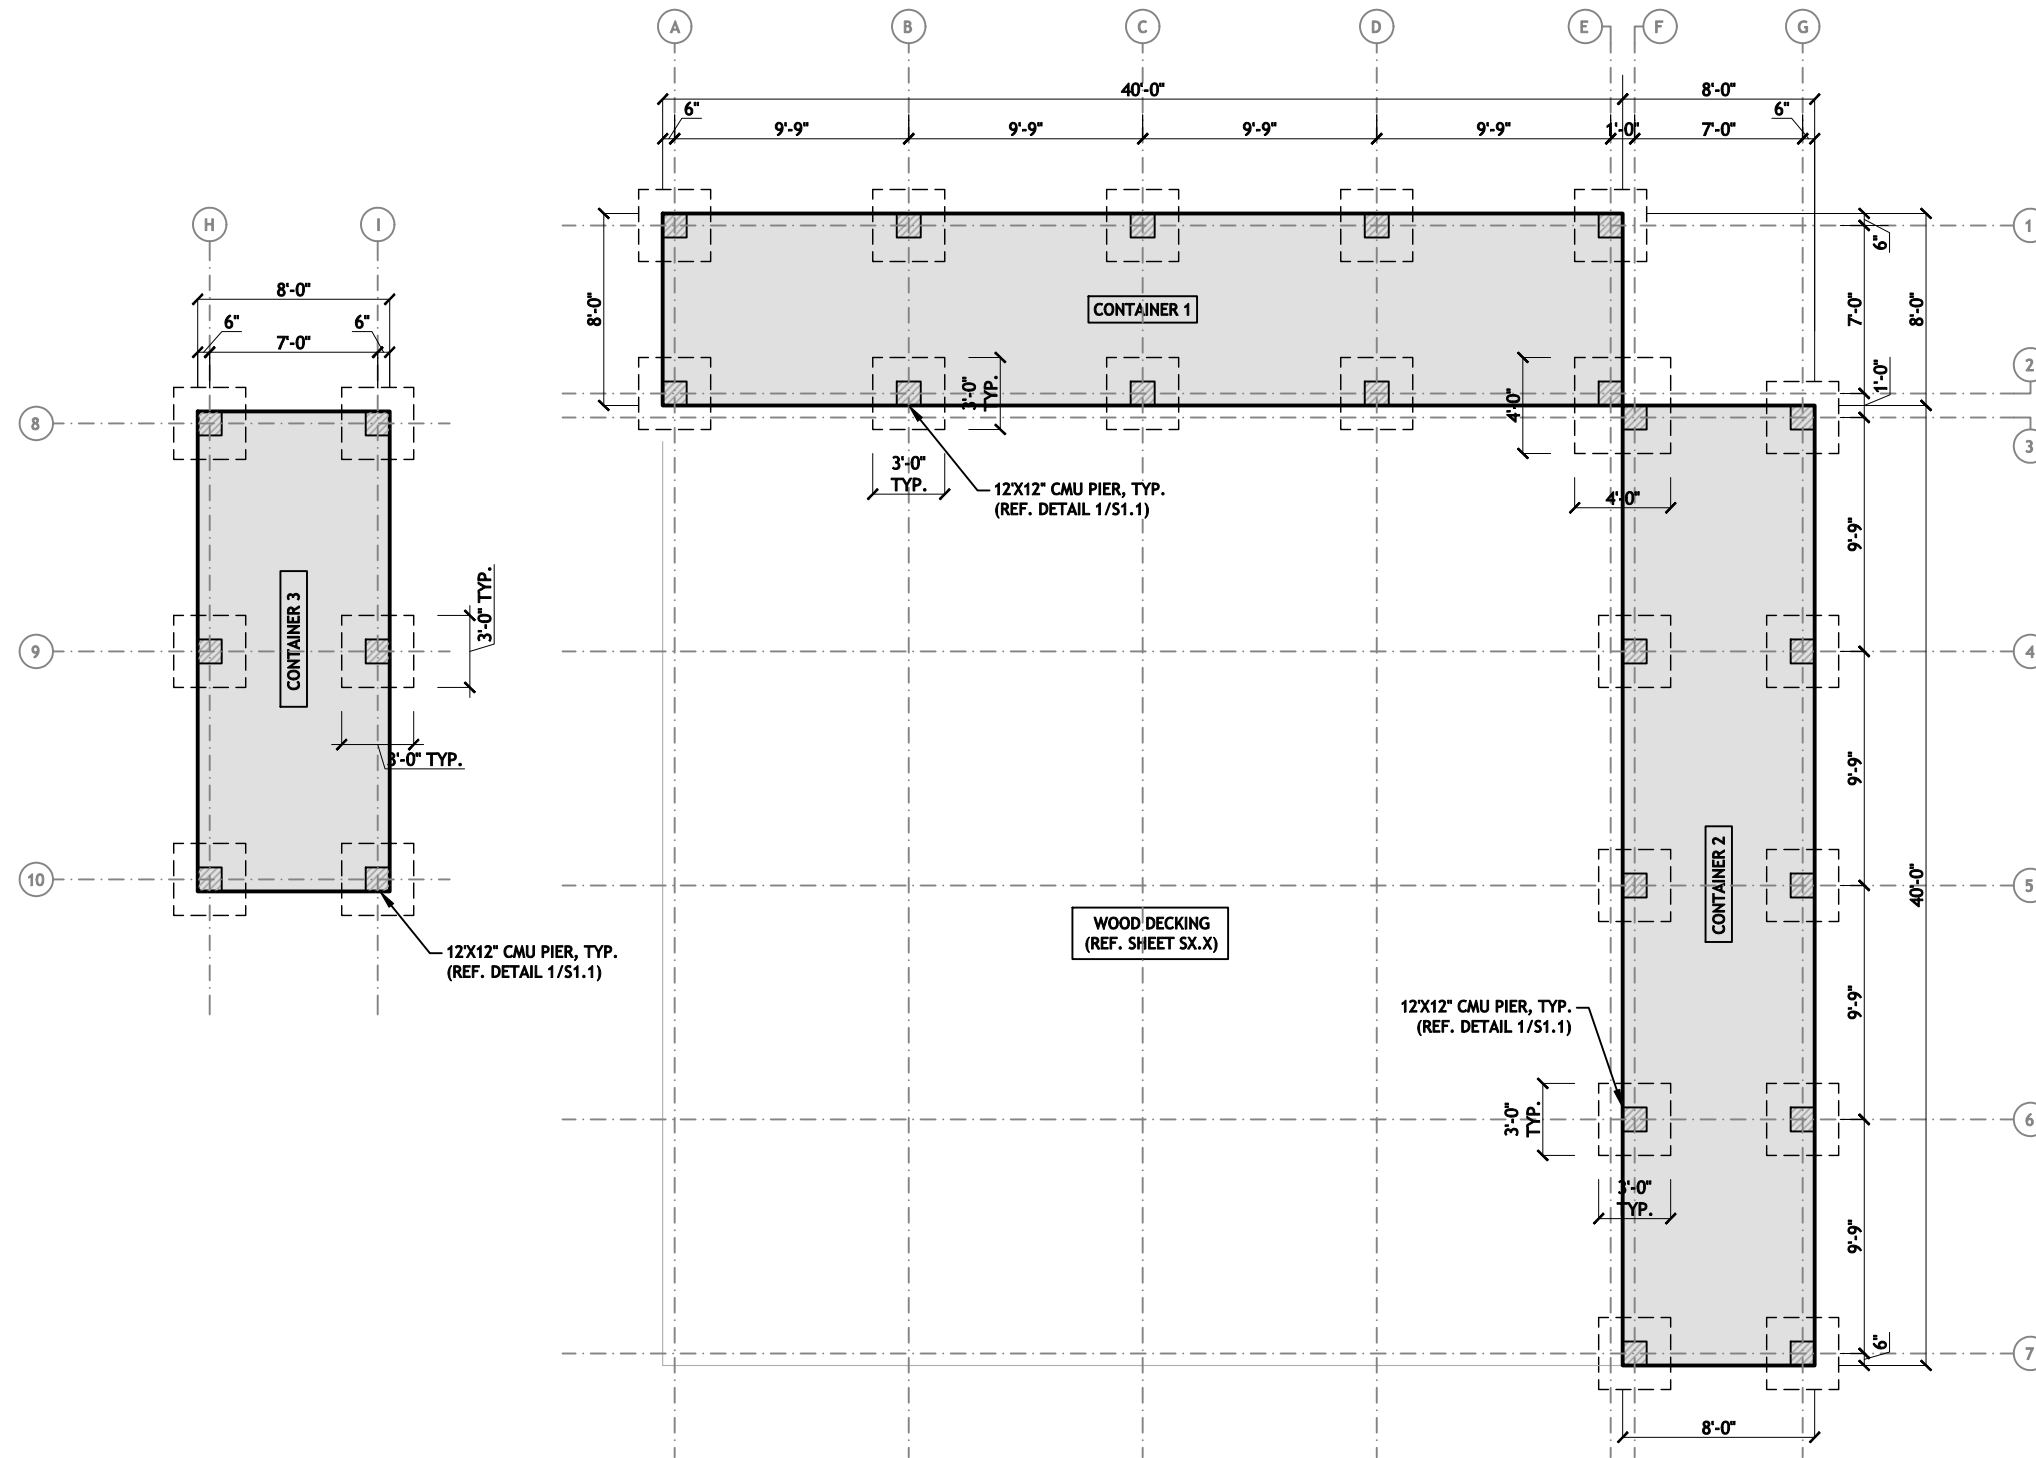

PLAN NOTES

1. CONCRETE CONTRACTOR MUST VERIFY ALL DIMENSIONS AND COORDINATE STRUCTURAL PLANS AND DETAILS WITH ARCHITECTURAL DRAWINGS BEFORE CONCRETE WORK.
2. THE ENGINEER OF RECORD SHALL BE NOTIFIED OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION.
3. REFER TO ARCHITECTURAL DRAWINGS FOR SLAB DROPS & ACCESSIBILITY REQUIREMENTS

CONTRACTOR TO VERIFY FINAL DIMENSIONS WITH ARCHITECTURE. CONCRETE FORM CONSTRUCTION TO BE SET BY ARCHITECTURAL PLANS/DIMENSIONS ONLY


PRE-POUR INSPECTION BY SEC REPRESENTATIVE IS REQUIRED. TO SCHEDULE CONTACT OFFICE@SECTEXAS.COM OR CALL 512-215-4364

- GEOTECHNICAL SUMMARY**
1. GEOTECHNICAL REPORT BY: SEC SOLUTIONS LLC
 2. PROJECT NUMBER: 25251
 3. DESIGN PI: 5
 4. ALLOWABLE BEARING CAPACITY: PSF

CONTAINER FOOTING/PIER LOCATION PLAN


SCALE: 1/8"=1'-0"

407 Forrest St
Liberty Hill, TX 78642
(512) 215-4364
F-15009



**MONK'S MOUNTAIN DR.
RESIDENCE
AUSTIN, TX 78734**

**COORDINATION DRAWINGS.
NOT FOR CONSTRUCTION.**



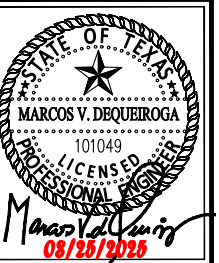


NO.	REVISION	DATE
1.	REVIEW SET	08-25-25

PROJECT: 25251
DATE: 08-25-25
DRAWN BY: DL

SCALE: AS NOTED

S1.0

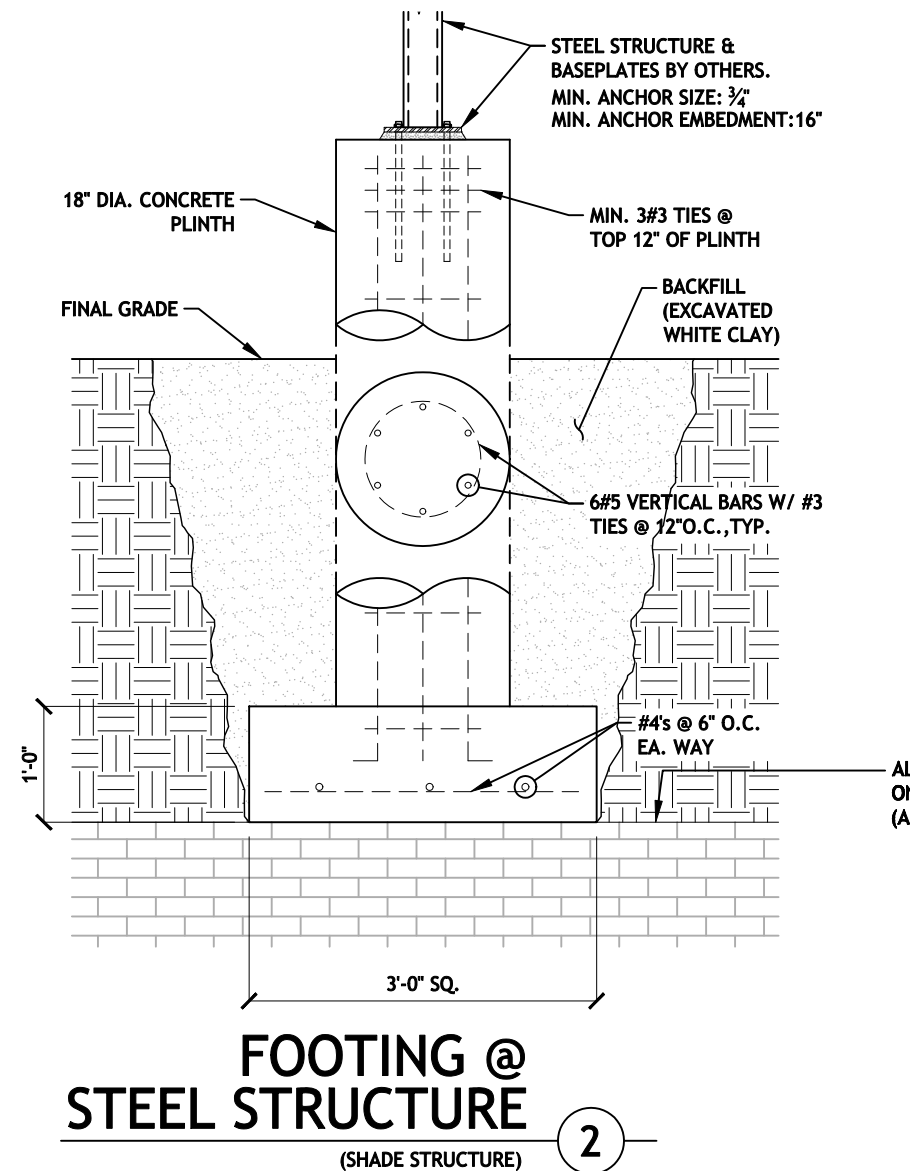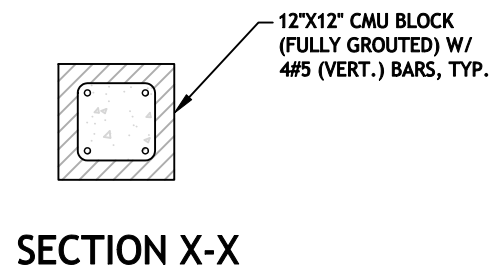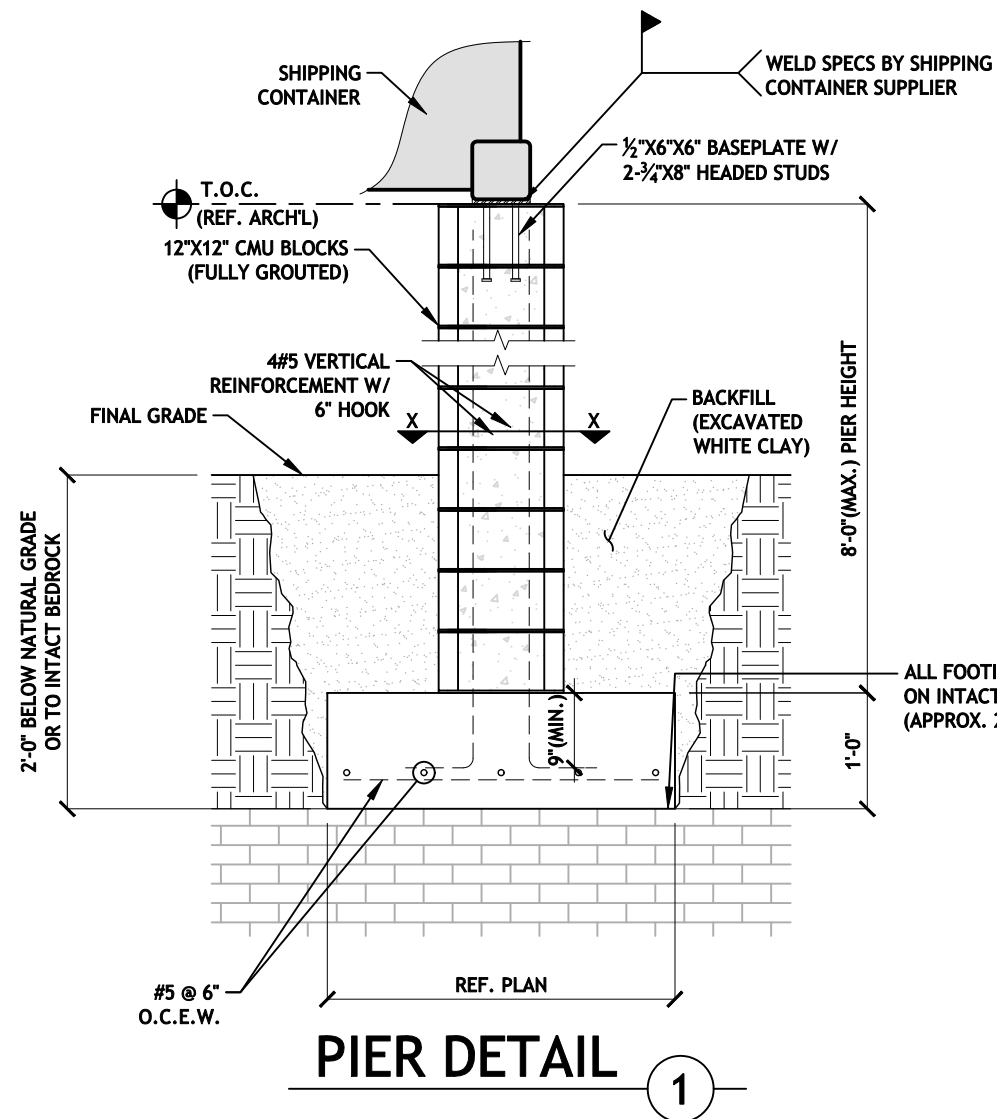

CONTAINER FOOTING/PIER DETAILS


SCALE: 1/8"=1'-0"

407 Forrest St
Liberty Hill, TX 78642
(512) 215-4364
F-15009



MONK'S MOUNTAIN DR.
RESIDENCE
AUSTIN, TX 78734

COORDINATION DRAWINGS.
NOT FOR CONSTRUCTION.

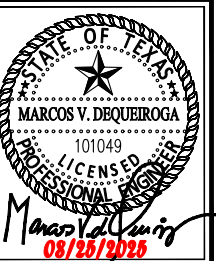


NO.	REVISION	DATE
1.	REVIEW SET	08-25-25

PROJECT: 25251
DATE: 08-25-25
DRAWN BY: DL

SCALE: AS NOTED

S1.1

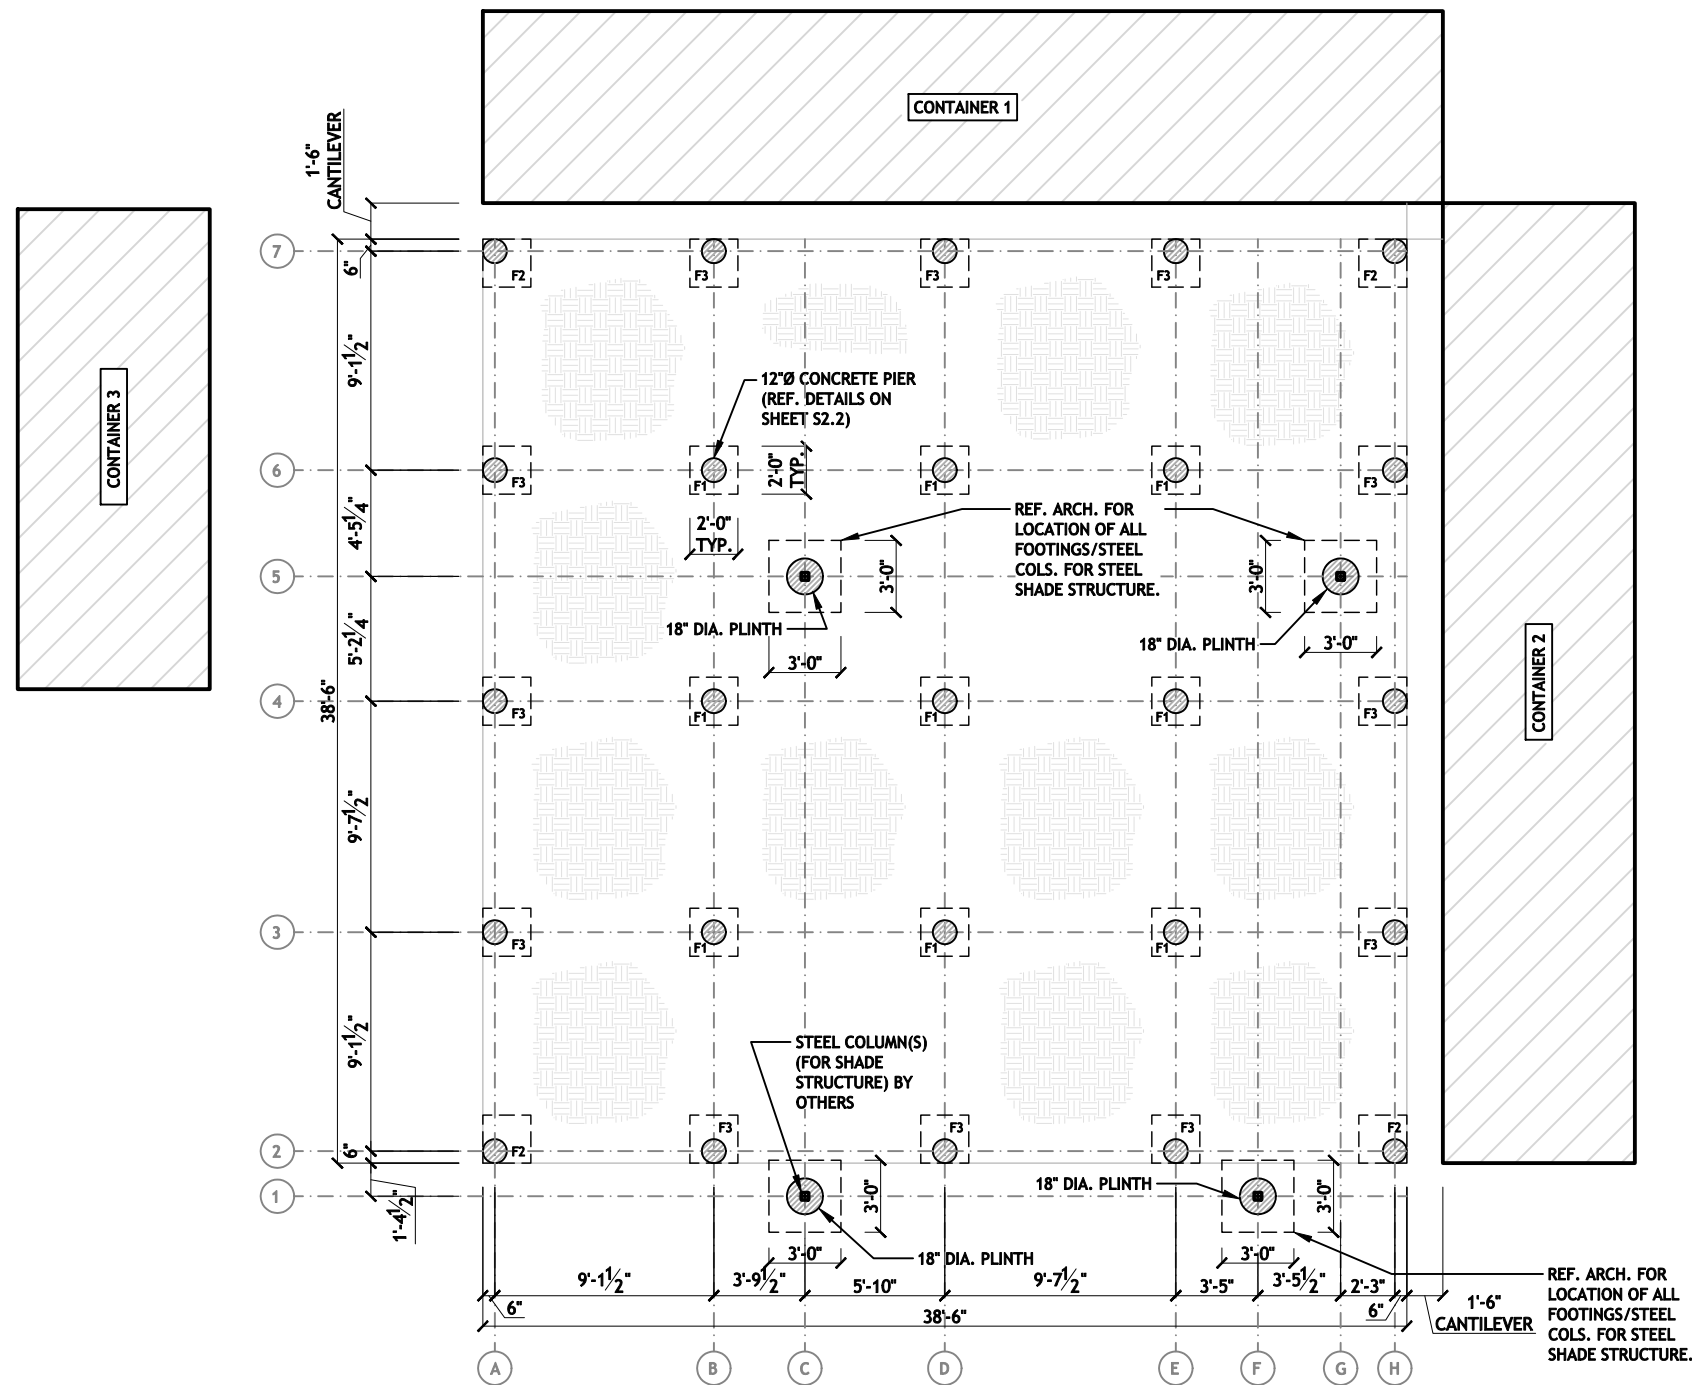

CONTRACTOR TO VERIFY FINAL DIMENSIONS WITH ARCHITECTURE. CONCRETE FORM CONSTRUCTION TO BE SET BY ARCHITECTURAL PLANS/DIMENSIONS ONLY

PRE-POUR INSPECTION BY SEC REPRESENTATIVE IS REQUIRED. TO SCHEDULE CONTACT OFFICE@SECTEXAS.COM OR CALL 512-215-4364

PLAN NOTES

1. CONCRETE CONTRACTOR MUST VERIFY ALL DIMENSIONS AND COORDINATE STRUCTURAL PLANS AND DETAILS WITH ARCHITECTURAL DRAWINGS BEFORE CONCRETE WORK.
2. THE ENGINEER OF RECORD SHALL BE NOTIFIED OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION.
3. REFER TO ARCHITECTURAL DRAWINGS FOR SLAB DROPS & ACCESSIBILITY REQUIREMENTS

MATERIAL NOTES

1. CONCRETE COMPRESSIVE STRENGTH (28 DAYS): 3000 PSI
2. ALL LUMBER TO BE #1 SYP OR SUPERIOR.
3. ALL NEW LUMBER IN CONTACT WITH CONCRETE MUST BE PRESSURE TREATED.
4. WOOD JOISTS CLOSER THAN 18 INCHES TO GRADE MUST BE PRESSURE TREATED.
5. WOOD GIRDERS CLOSER THAN 12 INCHES TO EXPOSED GROUND MUST BE PRESSURE TREATED.

GEOTECHNICAL SUMMARY


1. GEOTECHNICAL REPORT BY: SEC SOLUTIONS LLC
2. PROJECT NUMBER: 25251
3. DESIGN PI: 5
4. ALLOWABLE BEARING CAPACITY: PSF

407 Forrest St
Liberty Hill, TX 78642
(512) 215-4364
F-15009



MONK'S MOUNTAIN DR.
RESIDENCE
AUSTIN, TX 78734

COORDINATION DRAWINGS.
NOT FOR CONSTRUCTION.

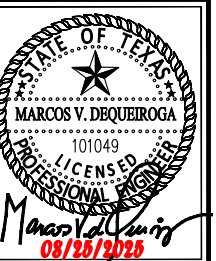

NO.	REVISION	DATE
1.	REVIEW SET	08-25-25


PROJECT: 25251
DATE: 08-25-25
DRAWN BY: DL

SCALE: AS NOTED

S2.0

DECK FOOTING/PIER LOCATION PLAN

SCALE: 1/8"=1'-0"

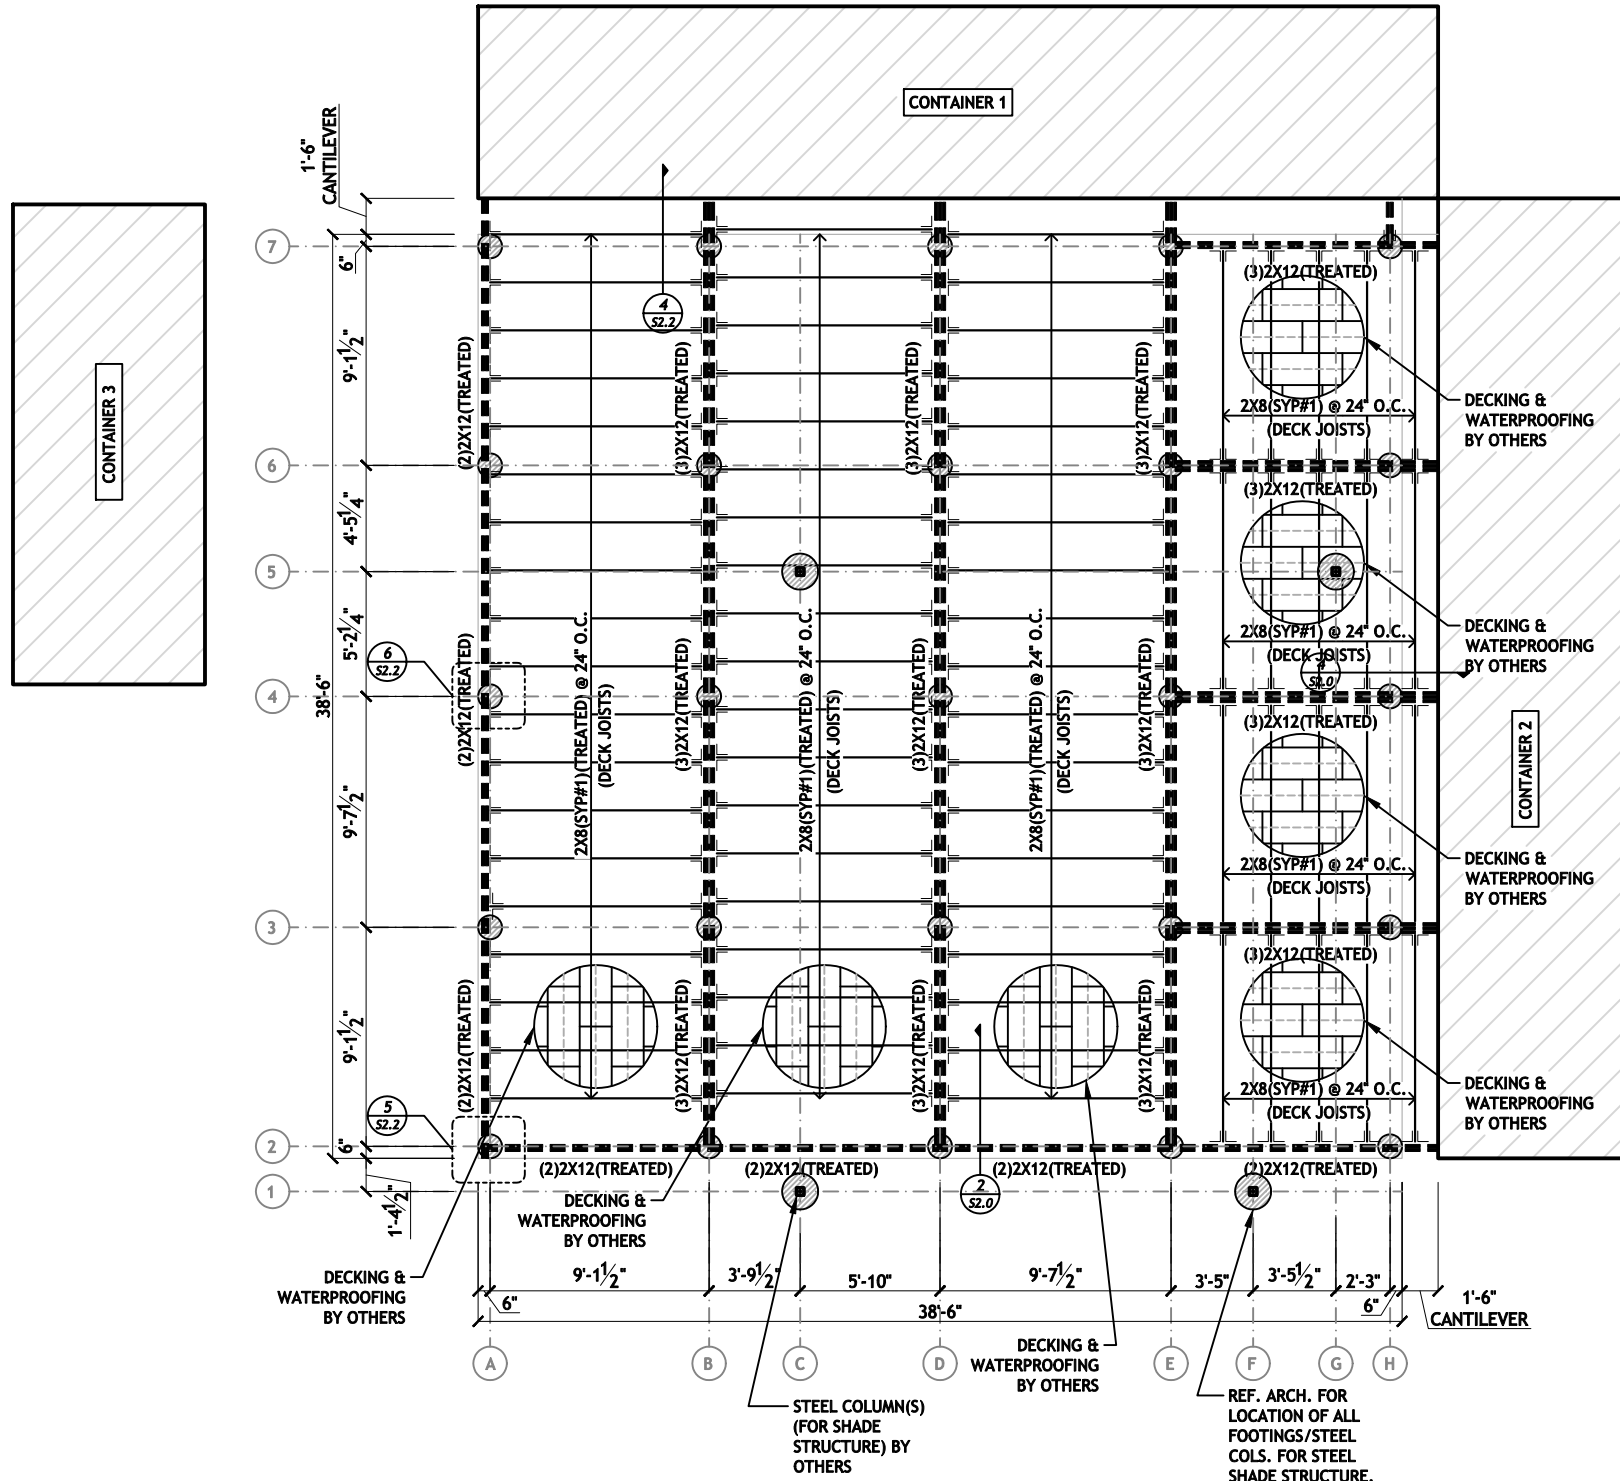

CONTRACTOR TO VERIFY FINAL DIMENSIONS WITH ARCHITECTURE. CONCRETE FORM CONSTRUCTION TO BE SET BY ARCHITECTURAL PLANS/DIMENSIONS ONLY

PRE-POUR INSPECTION BY SEC REPRESENTATIVE IS REQUIRED. TO SCHEDULE CONTACT OFFICE@SECTEXAS.COM OR CALL 512-215-4364

PLAN NOTES

1. CONCRETE CONTRACTOR MUST VERIFY ALL DIMENSIONS AND COORDINATE STRUCTURAL PLANS AND DETAILS WITH ARCHITECTURAL DRAWINGS BEFORE CONCRETE WORK.
2. THE ENGINEER OF RECORD SHALL BE NOTIFIED OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION.
3. REFER TO ARCHITECTURAL DRAWINGS FOR SLAB DROPS & ACCESSIBILITY REQUIREMENTS


MATERIAL NOTES

1. CONCRETE COMPRESSIVE STRENGTH (28 DAYS): 3000 PSI
2. ALL LUMBER TO BE #1 SYP OR SUPERIOR.
3. ALL NEW LUMBER IN CONTACT WITH CONCRETE MUST BE PRESSURE TREATED.
4. WOOD JOISTS CLOSER THAN 18 INCHES TO GRADE MUST BE PRESSURE TREATED.
5. WOOD GIRDERS CLOSER THAN 12 INCHES TO EXPOSED GROUND MUST BE PRESSURE TREATED.

GEOTECHNICAL SUMMARY


1. GEOTECHNICAL REPORT BY: SEC SOLUTIONS LLC
2. PROJECT NUMBER: 25251
3. DESIGN PI: 5
4. ALLOWABLE BEARING CAPACITY: PSF

407 Forrest St
Liberty Hill, TX 78642
(512) 215-4364
F-15009



MONK'S MOUNTAIN DR.
RESIDENCE
AUSTIN, TX 78734

COORDINATION DRAWINGS.
NOT FOR CONSTRUCTION.

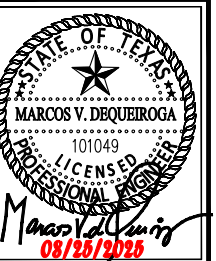

NO.	REVISION	DATE
1.	REVIEW SET	08-25-25


PROJECT: 25251
DATE: 08-25-25
DRAWN BY: DL

SCALE: AS NOTED


DECK FRAMING PLAN

SCALE: 1/8"=1'-0"


S2.1

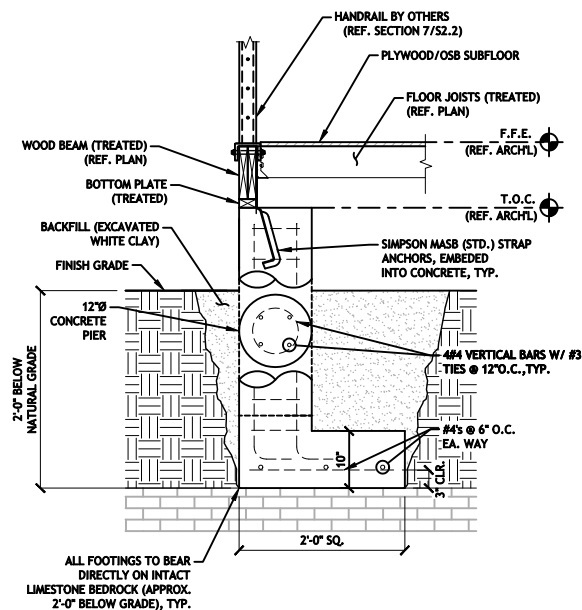


PIER & BEAM, TYP. TYPE F2/F3 ①

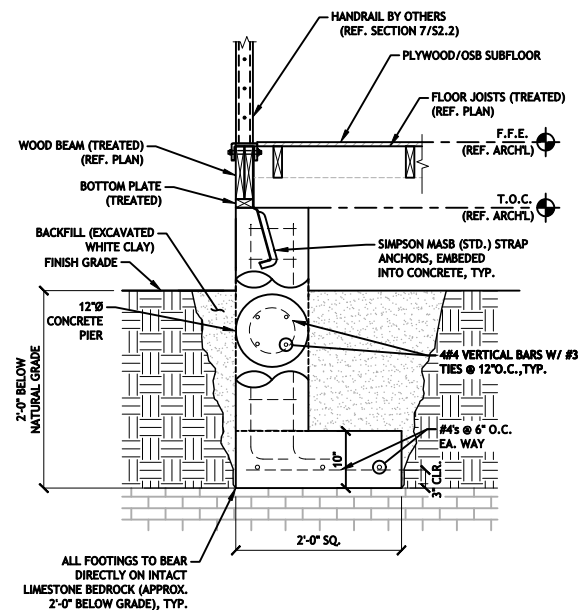


PIER & BEAM, TYP. TYPE F2/F3 ②

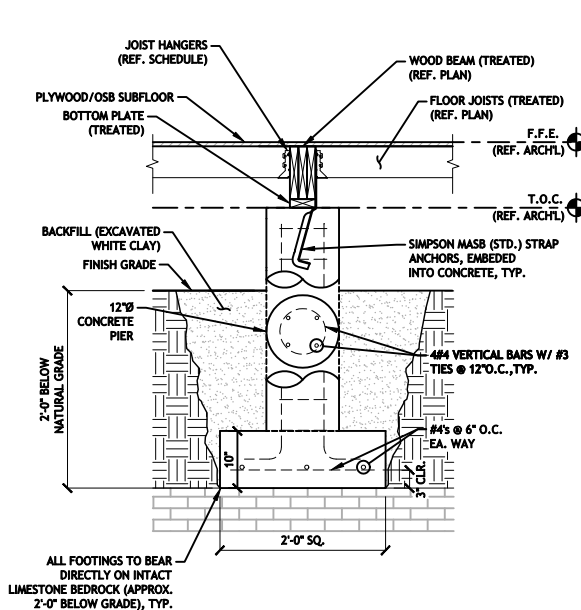


PIER & BEAM, TYP. TYPE F1 ③

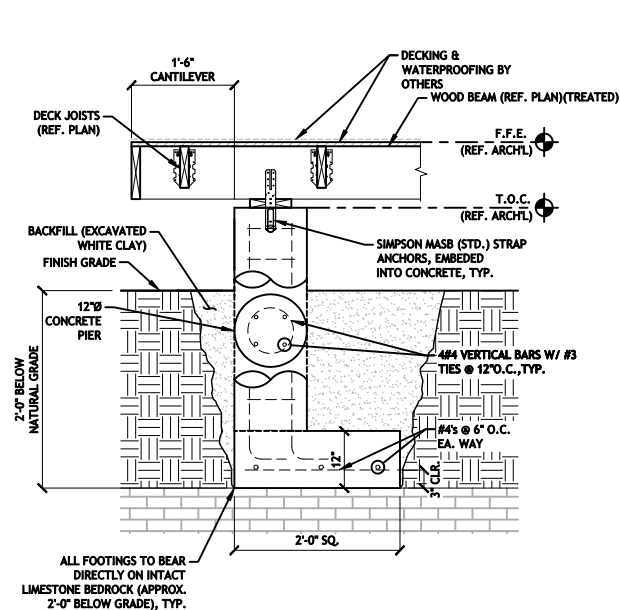


PIER & BEAM, TYP. ④

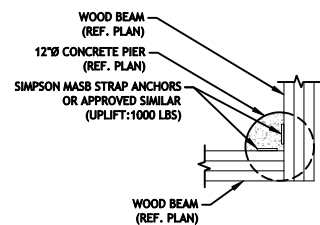


DETAIL ⑤

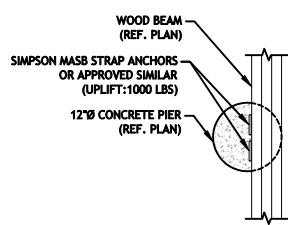

DETAIL ⑥

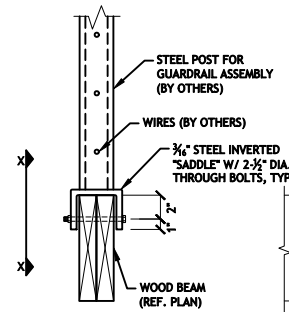

SECTION ⑦

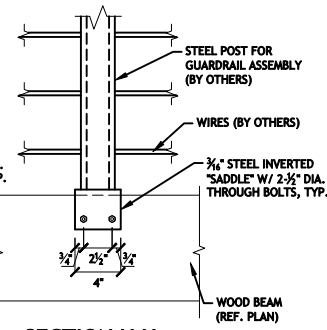

SECTION X-X

CONTAINER FOOTING/PIER DETAILS


SCALE: N.T.S.

407 Forrest St
Liberty Hill, TX 78642
(512) 215-4364
F-15009



MONK'S MOUNTAIN DR.
RESIDENCE
AUSTIN, TX 78734

COORDINATION DRAWINGS.
NOT FOR CONSTRUCTION.

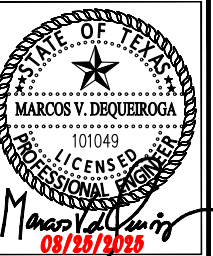

NO.	REVISION	DATE
1.	REVIEW SET	08-25-25

PROJECT: 25251
DATE: 08-25-25
DRAWN BY: DL

SCALE: AS NOTED

S2.2